


Special Limited Time Offer - \$27,999 + Tax

Includes 12" Backhoe Bucket & 52" Loader Bucket.

XT855 EXCAVATOR-TOOL CARRIER

It's amazing what one person with the right compact utility equipment can do. With the incredibly versatile and agile XT855 excavator-tool carrier, you can dig around corners, offset dig along fences and buildings, and deposit spoils anywhere within its unbeatable 260° swing arc. Turn it around and it's ready to trench, lift, break, move, or restore just about anything on your jobsite with any of its 70 quick-attach compact utility attachments. And at just 50 inches (1.3 m) wide, it's a machine you can take virtually anywhere and still expect big-time production.

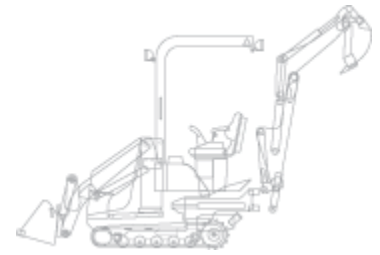

KEY FEATURES DETAILS

KEY FEATURES, XT855

DETAILS, XT855

- Optional extension legs provide additional leveling support in difficult digging conditions, improving productivity.
- Quick-connect attachment plate accepts more than 70 Ditch Witch compact utility attachments.
- With a turbocharged, 30-hp (22.4 kW) engine and 18 hp (13.4 kW) to the attachment, the XT855 has the power to get the job done and get on to the next.
- One easy-access service compartment contains valves, fuses, relays, and controller, simplifying maintenance and minimizing downtime.
- Choice of turf-friendly or aggressive tracks, depending on jobsite conditions.
- Zero-radius turning enables the XT855 to fit into tight spots with ease.

SPECS

SPECIFICATIONS, XT855

DIMENSIONS - TOOL CARRIER

	U.S.	METRIC
Operating height, w/ standard bucket, max.		
Hinge pin height, max.	104 in	2.64 m
Dump height, w/ standard bucket, max.	83 in	2.1 m
Bucket rollback angle, ground level: 16°	69 in	1.75 m
Reach at grade, standard bucket		
Reach, w/ standard bucket, fully raised	34 in	864 mm
Wheelbase/track length	21 in	533 mm
Overall height	46 in	1.17 m
Bucket width, max.	89 in	2.26 m
Machine width	52 in	1.32 m
Overall length, excavator stowed	50 in	1.27 m
Weight	120 in	3.05 m
w/ optional extension legs	4440 lb	2014 kg
	4520 lb	2050 kg

DIMENSIONS - EXCAVATOR

	U.S.	METRIC
Loading height, max.		
Dig depth, max.	72 in	1.82 m
Reach from swing post, max.	83 in	2.11 m
Swing angle from center: 130°	103 in	2.62 m
Total swing angle: 260°		

PERFORMANCE

	U.S.	METRIC
Ground drive speed		
Forward		
Reverse	4.2 mph	6.8 km/h
Ground pressure	4.2 mph	6.8 km/h
Angle of departure: 30°	4.5 psi	0.31 bar
Tipping capacity		
w/ optional extension legs	2715 lb	1232 kg
Rated operating capacity (35% of tip capacity)	3085 lb	1400 kg
w/ optional extension legs	950 lb	431 kg
Drawbar pull	1080 lb	490 kg
	3280 lb	1488 kg

HYDRAULIC SYSTEM

	U.S.	METRIC
Auxiliary: dual gear pumps		
Flow rate		
Pressure	7/15 gpm	26.4/56.8 L/min
Ground drive: dual hydrostat	3100 psi	214 bar
Flow rate		
Pressure	13 gpm	49.2 L/min
	3625 psi	250 bar

POWER

	U.S.	METRIC
Engine: Kubota D1105-T-E3B		
Fuel: Diesel		
Cooling medium: Liquid		
Injection: Indirect		
Aspiration: Turbocharged		
Number of cylinders: 3		
Displacement		
Bore	68.53 in ³	1.1 L
Stroke	3.07 in	78 mm
Engine manufacturer's gross power rating	3.09 in	78.5 mm
Estimated net power rating	32.8 hp	24.4 kW
Rated speed: 3000 rpm	29.5 hp	22 kW
Emissions compliance	EPA Tier 4i	EU Stage IIIA

FLUID CAPACITIES

	U.S.	METRIC
Fuel tank	10 gal	37.8 L
Hydraulic reservoir	7.5 gal	28.4 L

BATTERY

SAE reserve capacity rating: 110 min
 SAE cold crank rating @ 0° F (-18° C): 800 amps



Ditch Witch[®]
of the Carolinas
www.dwotc.com
(877)875-9616

Charlotte: Toll Free: (877) 875-9616
 Ladson: Toll Free: (877) 875-9650
 Columbia: Toll Free: (877) 875-9651
 Simpsonville: Toll Free: (877) 875-9649